




STANDARARD HOLLOW METAL FRAME HINGE AND STRIKE LOCATION CHART (1 3/4" DOORS)

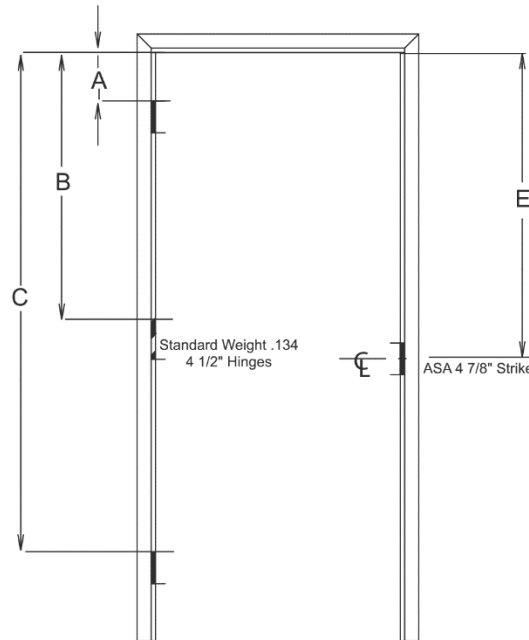

Measure from the underside of the frame head, to the top of each hinge cut-out

Measure from the underside of the frame head, to the center-line of the strike

Note:
8'0" frames have a 4th hinge;
bottom hinge = D
(not shown in drawing)

MANUFACTURER	6'8"				7'0"				8'0"				
	A	B	C	E	A	B	C	E	A	B	C	D	E
CECO	6 3/4"	37 3/4"	68 3/4"	38 3/16"	6 3/4"	39 3/4"	72 3/4"	42 3/16"	6 3/4"	32 3/4"	58 3/4"	84 3/4"	54 3/16"
CURRIES	5"	35 1/4"	65 1/2"	40"	5"	37 1/4"	69 1/2"	44"	5"	30 1/2"	56"	81 1/2"	56"
FENESTRA	5 1/4"	35 1/4"	65 1/4"	39 11/16"	5 1/4"	37 1/4"	69 1/4"	43 11/16"	5 1/4"	30 5/8"	55 15/16"	81 1/4"	55 11/16"
KEWANEE	7 3/8"	37 7/16"	67 1/2"	39 11/16"	7 3/8"	39 7/16"	71 1/2"	43 11/16"	7 3/8"	32 3/4"	58 1/8"	83 1/2"	55 11/16"
MESKER	5"	35 1/4"	65 1/2"	39 11/16"	5"	37 1/4"	69 1/2"	43 11/16"	5"	30 3/8"	56"	81 1/4"	55 11/16"
PIONEER	5"	35 1/4"	65 1/2"	42"	5"	37 1/4"	69 1/2"	46"	5"	30 1/2"	56"	81 1/2"	58"
REPUBLIC	7 1/2"	37 7/16"	67 3/8"	39 11/16"	9 1/2"	39 7/16"	69 3/8"	43 11/16"	5"	30 1/4"	56"	81 1/4"	55 11/16"
STEELCRAFT	7 1/2"	37 7/16"	67 3/8"	39 11/16"	7 1/2"	39 7/16"	71 3/8"	43 11/16"	7 1/2"	32 25/32"	58 1/16"	83 3/8"	55 11/16"